

Catalog Information

2-WIRE (L)	3-WIRE (H)	WIDE 2-WIRE (J)	LAMP TYPE	MAX WATT	FINISHES
			MR11	35W	BK, WT, GL/BK, GL/WT, BN/BK, BN/WT
LHT-1102	HHT-1102	JHT-1102			

Finish Key: BK-Black, WT-White, GL/BK-Black with Gold Head, GL/WT-White with Gold Head, BN/BK-Black with Brushed Nickel Head, BN/WT-White with Brushed Nickel Head

Product Features

- Electronic transformer:** With auto reset and soft start. 120V to 12V.
- Dimmable:** With electronic dimmer or generally dimmable with standard incandescent dimmers.
- Aiming:** 90° degrees from vertical and 356° rotational.
- Compatible:** L, H, and J models in addition to fitting our own tracks are retrofitable to other manufacturers original tracks (consult factory for specific brand names).
- Special Application:** The J style head may be installed on any "J" style 2-circuit track with the addition of the J-CLIP.
- Lamping:** Re-lamps from the front, lamp retained by a tension ring.
- Socket:** Bi-pin ceramic with 18 gauge Teflon insulated wires, with fiberglass sleeves.

Options/Accessories

- Lens Options: Colored, Colored Dichroic and Ultra Violet lenses.
- Fixtures available with 6", 12", 18", 24", 36", 48", 72", 96" extensions (factory assembled in BK, WT or BN). Specify fixture style and finish when ordering (i.e.: X18-HHT-1102-BK). Extensions are non-stock items, available only as a complete unit from the factory. Note: Extensions over 48" in length are shipped with two shorter rods and a threaded coupler, to be joined in the field.

Material

Die Cast Aluminum

Listings

UL, CUL Listed, New York City Approved.


W.A.C. reserves the right to change details that do not affect overall function and performance.



SPECIFICATION SHEET

LOW VOLTAGE TRACK HEADS

MODEL 1102

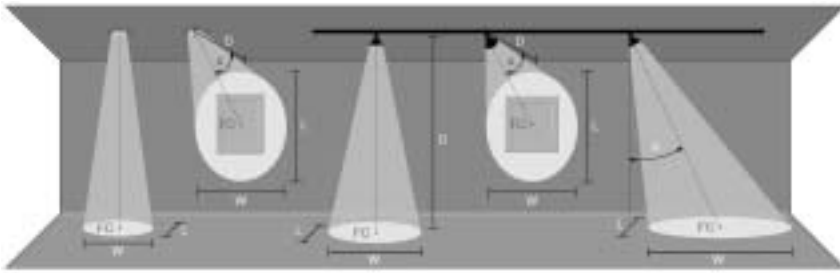

Key In Feet
D Distance To Fixture From Wall Or Floor
FC Initial Footcandle Level At Center Of Beam
L Beam Length (where candlepower drops to 50% of maximum)
W Beam Width (where candlepower drops to 50% of maximum)
CBCP Center Beam Candle Power

0° Aiming Angle

30° Aiming Angle

45° Aiming Angle

60° Aiming Angle

Lamp	Beam Spread	CBCP	
20W MR11	NFL 30°	600	
FTD			
20W MR11*	NSP 17°		1760
FTC			
35W MR11*	SP 20°	3000	
FTF			
35W MR11	NFL 30°		1300
FTH			

D	FC	L	W
2'	150	1.1'	1.1'
3'	67	1.6'	1.6'
4'	38	2.1'	2.1'
5'	24	2.7'	2.7'
3'	196	0.9'	0.9'
5'	70	1.5'	1.5'
7'	36	2.1'	2.1'
9'	22	2.7'	2.7'
3'	333	1.1'	1.1'
5'	120	1.8'	1.8'
7'	61	2.5'	2.5'
9'	37	3.2'	3.2'
3'	144	1.6'	1.6'
5'	52	2.7'	2.7'
7'	27	3.8'	3.8'
9'	16	4.8'	4.8'

D	FC	L	W
2'	97	1.5'	1.2'
3'	43	2.2'	1.9'
4'	24	2.9'	2.5'
5'	16	3.7'	3.1'
3'	127	1.2'	1.0'
5'	46	2.0'	1.7'
7'	23	2.8'	2.4'
9'	14	3.6'	3.1'
3'	217	1.4'	1.2'
5'	78	2.4'	2.0'
7'	40	3.3'	2.9'
9'	24	4.3'	3.7'
3'	94	2.2'	1.9'
5'	34	3.7'	3.1'
7'	17	5.1'	4.3'
9'	10	6.6'	5.6'

D	FC	L	W
2'	53	2.3'	1.5'
3'	24	3.5'	2.3'
4'	13	4.6'	3.0'
5'	8	5.8'	3.8'
3'	69	1.8'	1.3'
5'	25	3.1'	2.1'
7'	13	4.3'	3.0'
9'	8	5.5'	3.8'
3'	118	2.2'	1.5'
5'	42	3.6'	2.5'
7'	22	5.1'	3.5'
9'	13	6.6'	4.5'
3'	51	3.5'	2.3'
5'	18	5.8'	3.8'
7'	9	8.1'	5.3'
9'	6	10.4'	6.8'

D	FC	L	W
2'	19	5.5'	2.1'
3'	8	8.2'	3.2'
4'	5	10.9'	4.3'
5'	3	13.7'	5.4'
3'	24	3.8'	1.8'
5'	9	6.4'	3.0'
7'	4	9.0'	4.2'
9'	3	11.5'	5.4'
3'	42	4.7'	2.1'
5'	15	7.8'	3.5'
7'	8	10.9'	4.9'
9'	5	14.0'	6.3'
3'	18	8.2'	3.2'
5'	7	13.7'	5.4'
7'	3	19.1'	7.5'
9'	2	24.6'	9.6'

*Not Sold by W.A.C Lighting